


The Etruscan collection is a glazed porcelain series that brings the warm look of terracotta to your space. This Italian pressed tile is available in four colors: Beige (Lazio), Rose Brown (Umbria), Red (Toscana), and Brown (Marche) and in a variety of modular sizes. To complement this look, there are gorgeous decos that are worn and have an antiqued aesthetic to them. Trim pieces are available as well. Lazio is rated for all residential and commercial applications, while Umbria, Toscana, and Marche are rated for all residential and light commercial applications.

Minimum reccommended grout joint for this tile is 3/16" PER ANSI standard A108.02,4,3,8,2, joints on tiles longer than 15" should not be staggered more than 1/3 the length of the tile.



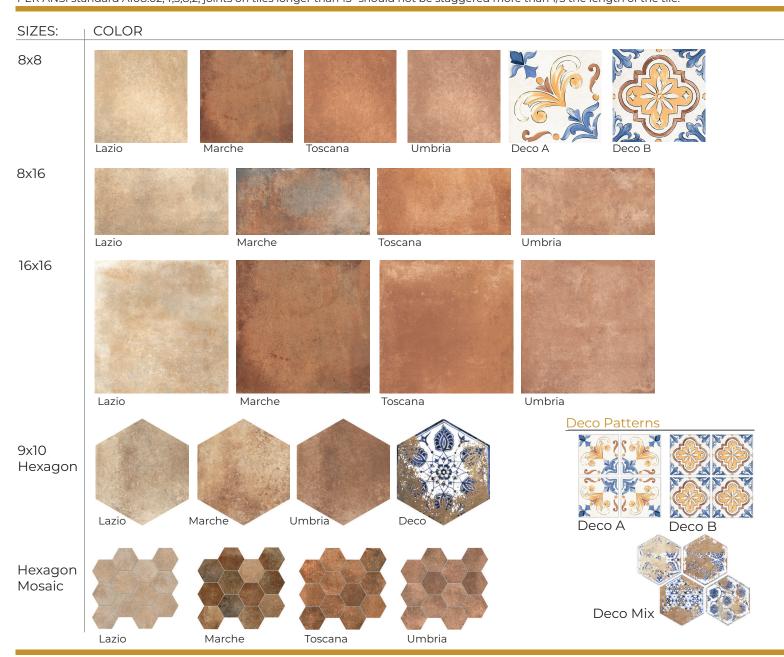

ETRUSCAN

TECHNICAL INFORMATION

SHADE VARIATION



V4 - Random Variation for Marche Random Color differences from tile to tile, so that one tile may have totally different colors from that of other tiles. Thus the final installation will be unique.



V3 - Moderate Variation for all other colors While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

WEAR CODE

Lazio: 5

Rated for all residential and commercial applications.

All other colors: 4

Rated for all residential and light commercial applications.

PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.5%
Abrasion Resistance (Glazed)	ISO 10545-7	5 - Lazio; 4 - All Others
Breaking Strength	ISO 10545-4	≥35 N/mm2
Dynamic Coefficient of Friction Wet	AcuTest	0.77; Decos: 0.56
Dimensions Range	ISO 10545-2	Conforms
Front Resistance	ISO 10545-12	Frost Proof
Chemical Resistance Household Chemicals	ISO 10545-13	Min. Class B
Chemical Resistance Low Concentration of Acids and Bases	ISO 10545-13	Min. Class B
Thermal Shock Resistance	ISO 10545-9	Resists
Resistance to Stains	ISO 10545-14	Class 5
Crazing Resistance of Glazed Tiles	ISO 10545-11	Resistant

NOTES

It is not recommended to stagger any tile longer than 1/3 the length of the tile. Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.