







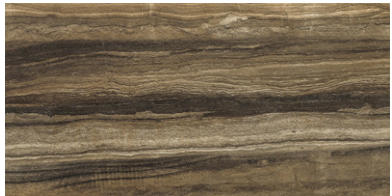







A contemporary blend of modern, vein-cut stone and petrified wood, Riff is a rectified Italian porcelain collection that is available in five fabulous colors, ranging from neutral white, beige and grey to vibrant brown and red. Available in a variety of sizes, Riff offers multiple installation ideas.

| SIZE | COLOR | | | | | | | | | | | |
|---|-------|--|--|------|--|--|-------|--|--|--|--|--|
| | white | | | grey | | | beige | | | | | |
| 4x24 Finish: matte Thickness: 10 mm | | | | | | | | | | | | |
| 6x36 Finish: matte Thickness: 10 mm | | | | | | | | | | | | |
| 9x36 Finish: matte Thickness: 10 mm | | | | | | | | | | | | |
| 12x24 Finish: matte Thickness: 10 mm | | | | | | | | | | | | |
| 2x2 Mosaic Finish: matte Thickness: 10 mm | | | | | | | | | | | | |
| 4" Hexagon Mosaic Finish: matte Thickness: 10 mm | | | | | | | | | | | | |
| Coordinating Trim: 3x24 Bullnose Finish: matte Thickness: 10mm | | | | | | | | | | | | |




A contemporary blend of modern, vein-cut stone and petrified wood, Riff is a rectified Italian porcelain collection that is available in five fabulous colors, ranging from neutral white, beige and grey to vibrant brown and red. Available in a variety of sizes, Riff offers multiple installation ideas.

| SIZE | COLOR | |
|--|---|--|
| <p>4x24 Finish: matte Thickness: 10 mm</p> | brown | red |
| <p>6x36 Finish: matte Thickness: 10 mm</p> |  |  |
| <p>9x36 Finish: matte Thickness: 10 mm</p> |  |  |
| <p>12x24 Finish: matte Thickness: 10 mm</p> |  |  |
| <p>2x2 Mosaic Finish: matte Thickness: 10 mm</p> |  |  |
| <p>4" Hexagon Mosaic Finish: matte Thickness: 10 mm</p> |  |  |
| <p>Coordinating Trim: 3x24 Bullnose Finish: matte Thickness: 10mm</p> |  |  |

RIFF TECHNICAL INFORMATION

SHADE VARIATION



V3 - Moderate Variation

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example “that little bit of color” on one piece of tile may be the primary color on the next piece.

WEAR CODE

4 - Rated for all residential and light commercial applications.

PERFORMANCE DATA

| CHARACTERISTIC | NORMS | RESULTS |
|--|--------------|------------------------|
| Water Absorption | ISO 10545-3 | 0.11 |
| PEI Abrasion Resistance (Glazed) | ISO 10545-7 | 4 |
| Breaking Strength | ISO 10545-4 | 38.3 N/mm ² |
| Dynamic Coefficient of Friction Wet | AcuTest | 0.46 |
| Frost Resistance | ISO 10545-12 | Frost Proof |
| Chemical Resistance - Household Chemicals | ISO 10545-13 | GA |
| Chemical Resistance - Low Concentration of Acids & Bases | ISO 10545-13 | GLA |
| Scratch Hardness | MOHS | 6.5 |
| Resistance to Stains | ISO 10545-14 | Class 5 |

NOTES

It is not recommended to stagger any tile longer than 18” more than 1/3 the length of the tile.

Grout joint recommendation: 1/8”

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

All product images are representative only. Variation in color and shading is to be expected. Final selection should be made from actual tile samples.