
T | L E 🔶 A M E R I C A°

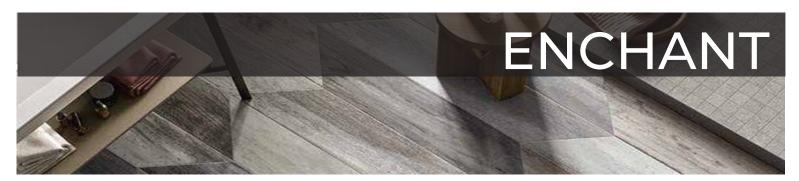

COMING SOON: The Enchant series is an American-made porcelain plank tile that is inspired by aged and painted wood. The collection is comprised of 3 highly variated colors: Oasis (blue/grey), Mystic (brown), and Spark (golden beige) and has a matching bullnose to complete the look.

Chevron shape of the Enchant collection is special order.

| COLOR | SIZE | |
|--------|----------------------|-----------------|
| | 8 x 40 | 8 x 40 Cheveron |
| Mystic | | |
| Oasis | Carl and to make the | |
| Spark | | |

T | L E 🔶 A M E R I C A°

ENCHANT TECHNICAL INFORMATION

TILE SIZE

| NOMINAL | SHAPE | MATERIAL | THICKNESS |
|----------|-------|-----------|-----------|
| 8 x 40 | 1000 | PORCELAIN | 9 MM |
| Cheveron | | PORCELAIN | 9 MM |

SHADE VARIATION

V3 - Moderate Variation



While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.

WEAR CODE

All sizes: 5

Rated for all residential and commercial applications.

APPLICATIONS

| | RESIDENTIAL | LIGHT COMMERCIAL | COMMERCIAL |
|-------------------------------|--------------|---------------------|------------|
| FIOORS | \checkmark | \checkmark | ✓ |
| WALLS / BACKSPLASH | ✓ | ✓ | ✓ |
| POOL DECKING | | | |
| EXTERNAL USE - FROST PROOF | ✓ | ✓ | ✓ |

PERFORMANCE DATA

| CHARACTERISTIC | NORMS | RESULTS |
|-------------------------------------|------------|-----------------|
| Water Absorption | ASTM C373 | ≤ 0.5% |
| Breaking Strength | ASTM C648 | ≥ 400 lbs |
| Chemical Resistance | ASTM C650 | Conforms |
| Dynamic Coefficient of Friction Wet | AcuTest | 0.42 |
| Dimensions | ASTM C499 | Conforms |
| Facial Range of Thickness | ASTM C499 | Conforms |
| Warpage (Diagonal) | ASTM C485 | Conforms |
| Wedging | ASTM C502 | Conforms |
| Frost Resistance | ASTM C1026 | Frost Resistant |
| Scratch Hardness | MOHS | 6 |
| NOTES | | |

It is not recommended to stagger any tile longer than 18" more than 1/3 the length of the tile.

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.