







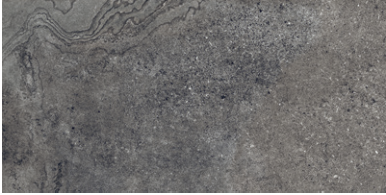









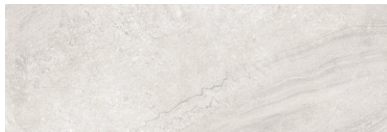


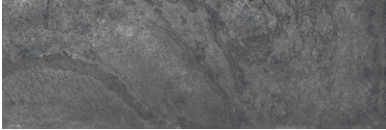


The graceful tone-on-tone of Watered Silk is reproduced in our newest porcelain line from Italy. Soothing and elegant, the distinctive veining of Watered Silk is offered in 5 colors in 12x24 and 8x24 sizes with both a matte and semi-polished finish. To complete the look, there is a 2x2 mosaic and a 3-D Muretto accent.

SIZE	COLOR		
2x2 Mosaic Finish: matte Thickness: 10.2 mm	antracite	avorio	beige
2.75x24 Finish: matte/ lappato Thickness: 10.2 mm			
8x24 Finish: lappato Thickness: 10.2 mm			
12x24 Finish: matte/ lappato Thickness: 10.2 mm			
12x24 3D Muretto Mosaic Finish: matte Thickness: 10.2 mm			
			




The graceful tone-on-tone of Watered Silk is reproduced in our newest porcelain line from Italy. Soothing and elegant, the distinctive veining of Watered Silk is offered in 5 colors in 12x24 and 8x24 sizes with both a matte and semi-polished finish. To complete the look, there is a 2x2 mosaic and a 3-D Muretto accent.

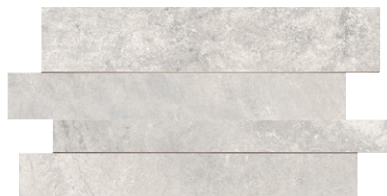SIZE	COLOR		
2x2 Mosaic Finish: matte Thickness: 10.2 mm	grigio	taupe	
2.75x24 Finish: matte/ lappato Thickness: 10.2 mm			
8x24 Finish: lappato Thickness: 10.2 mm			freddo mix 2x2 mosaic
12x24 Finish: matte/ lappato Thickness: 10.2 mm			
12x24 3D Muretto Mosaic Finish: matte Thickness: 10.2 mm			caldo mix 2x2 mosaic
			

WATERED SILK TECHNICAL INFORMATION

SHADE VARIATION



V3 - Moderate Variation
While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example “that little bit of color” on one piece of tile may be the primary color on the next piece.

WEAR CODE

5 - Rated for all residential and commercial applications.

PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.5%
Deep Abrasion	ISO 10545-6	< 175
PEI Abrasion Resistance (Glazed)	ISO 10545-7	5
Breaking Strength	ISO 10545-4	> 35 N/mm2
Dynamic Coefficient of Friction Wet	AcuTest	0.59 (matte only)
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	Min. GB
Thermal Shock Resistance	ISO 10545-9	Resistant
Resistance to Stains	ISO 10545-14	Min. Class 3
Crazing Resistance of Glazed Tiles	ISO 10545-11	Resistant

NOTES

It is not recommended to stagger any tile longer than 18” more than 1/3 the length of the tile.
Always inspect materials prior to installation.
Always mix 2-3 cartons at a time while installing to insure the best blend.
All product images are representative only. Variation in color and shading is to be expected.
Final selection should be made form actual tile samples.