


VENUS




MARS

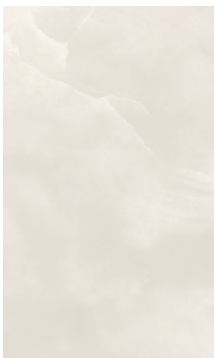

MERCURY



JUPITER

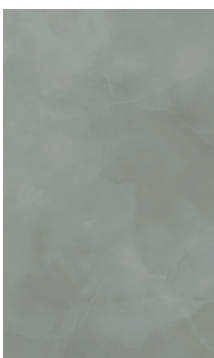

SATURN



COSMIX

Concrete Look

12x24, 24x48, 6x24, 24x24, 2x2 Mosaics &
3.8x4.4 Hexagon Mosaics


TILE

AMERICA

SHADE VARIATION

V2 - Slight Variation

Clearly distinguishable differences in texture and/or pattern within similar colors.



WEAR CODE

Class 5 Suitable for all Residential and Commercial Application. Class 5 tiles are suitable for all applications including those with heavy traffic and constant use.

PERFORMANCE DATA

THICKNESS: 9mm

Characteristics:	Norms:	Results
Water Absorption	ASTM C373	≤ 0.5 %
Deep Abrasion	ASTM C1243	< 175 mm ³
Dynamic Coefficient of Friction	AcuTest	≥ 0.42
Frost Resistance	ASTM C1026	Frost Proof
Scratch Hardness	MOHS	6
Breaking Strength	ASTM C648	≥ 400 lbf

Notes:

It is not recommended to stagger any tile longer than 15" more than 1/3 the length of the tile. Always inspect materials prior to installations. Always mix 2-3 cartons at a time while installing to insure the best blend.

Book An
Appointment



www.tileamerica.com