

FILO

USA Porcelain
12x24


TILE

AMERICA


SHADE VARIATION

V3 - Moderate Variation

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example “that little bit of color” on one piece of tile may be the primary color on the next piece.



GREIGE

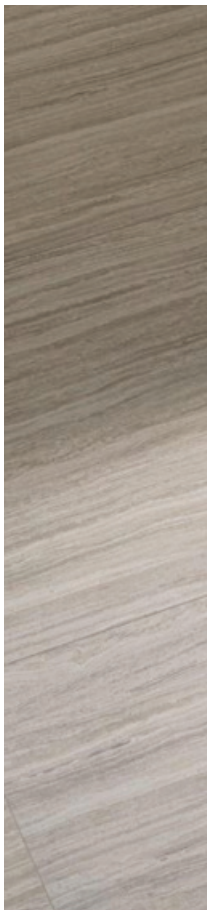

WEAR CODE

Class 4 All Residential and Light Commercial Applications. Class 4 tiles may be used in all residential areas and light commercial applications.

PERFORMANCE DATA

THICKNESS: 10 mm

Characteristics:

Water Absorption	≤0.5%
Abrasion Resistance (Glazed)	III
Chemical Resistance	Class A
Resistance to Stains	Class A
ANSI Usage Category	IW
Breaking Strength	≥ 275 lbf
DCOF AcuTest	≥0.42
Mohs Hardness	7
Grout Joint	3/16

Notes:

Always inspect materials prior to installations. Always mix 2-3 cartons at a time while installing to insure the best blend.

Book An
Appointment



www.tileamerica.com