

ICE



SAND




SEAWEED



ASH



COAL

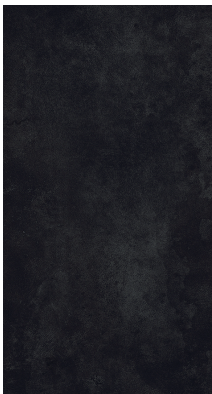

WAVE

Art Deco

12x24, 12x24 Deco, 2x2 Mosaic, Bullnose


TILE

AMERICA

SHADE VARIATION

V3 - Moderate Variation

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example "that little bit of color" on one piece of tile may be the primary color on the next piece.



WEAR CODE

Class 5 Suitable for all Residential and Commercial Application. Class 5 tiles are suitable for all applications including those with heavy traffic and constant use.

PERFORMANCE DATA

Characteristics:	Norms:	Results
Water Absorption	ASTM C373	≤ 0.1%
Breaking Strength	ASTM C648	≥ 400 lbs
Bond Strength	ASTM C482	≥ 200 psi
Dynamic Coefficient of Friction	AcuTest	≥ 0.45
Thickness Dimension	ASTM C499	In accordance
Facial Dimension	ASTM C499	In accordance
Warpage Diagonal	ASTM C485	In accordance
Wedging	ASTM C502	In accordance
Frost Resistance	ASTM C1026	Frost Proof
Chemical Resistance	ASTM C650	Class A
Scratch Hardness	MOHS	7

Notes:

It is not recommended to stagger any tile longer than 15" more than 1/3 the length of the tile. Always inspect materials prior to installations. Always mix 2-3 cartons at a time while installing to insure the best blend.

Book An
Appointment



www.tileamerica.com