






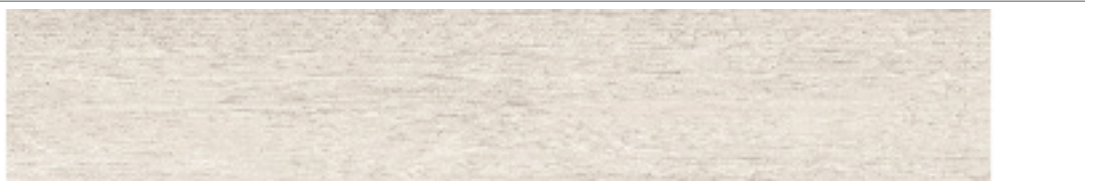



Fjord is the perfect solution for creating herringbone patterns. This small-scale wood plank glazed porcelain series is a durable and affordable product that is available in six warm and cool tones making it the perfect solution for multiple design concepts.

SIZES:	COLOR	
4x24	White	
	Coffee	
	Brown	
	Gray	
	Blue	
	Dark	

FJORD

TECHNICAL INFORMATION

SHADE VARIATION



V3 - Moderate Variation

While the colors present on a single piece of tile will be indicative of the colors to be expected on the other tiles, the amount of colors on each piece may vary significantly. For example “that little bit of color” on one piece of tile may be the primary color on the next piece.

WEAR CODE

White, Blue and Grey:

Class 4 All Residential and Light Commercial Applications. Class 4 tiles may be used in all residential areas and light commercial applications. (i.e., restaurants, offices)

Brown, Coffee and Dark:

Class 3 Residential Applications. Suitable for all residential applications.

PERFORMANCE DATA

CHARACTERISTIC	NORMS	RESULTS
Water Absorption	ISO 10545-3	≤ 0.5%
Abrasion Resistance	ISO 10545-7	3 / 4
Breaking Strength	ISO 10545-4	35-45 N/mm <sup>3</sup>
Dynamic Coefficient of Friction	AcuTest	> 0.42
Dimensions Range	ISO 10545-2	Conforms
Frost Resistance	ISO 10545-12	Frost Proof
Chemical Resistance - Household Chemicals	ISO 10545-13	A
Chemical Resistance - Low Concentration of Acids	ISO 10545-13	Conforms
Resistance to Stains	ISO 10545-14	Class 5
Crazing Resistance of Glazed Tiles	ISO 10545-11	Resists

NOTES

It is not recommended to stagger any tile longer than 15” more than 1/3 the length of the tile.

Always inspect materials prior to installation.

Always mix 2-3 cartons at a time while installing to insure the best blend.

We recommend a minimum grout joint of no less than 3/16” for pressed tiles.